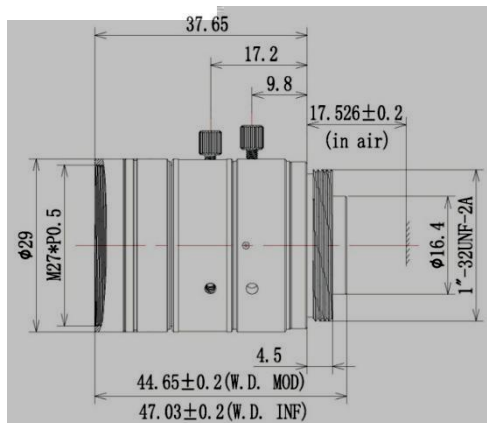


**FEATURES**

- ◆ Brand: ZLKC
- ◆ 2/3" C-Mount 12mm F2.0 10MP
- ◆ Shorter Working Distance
- ◆ Ensures Corner Brightness
- ◆ Nominal Distortion Design
- ◆ Compact design


**SPECIFICATION**

| Low WD Lenses 12mm 2/3" C Mount 10MP |                      |                   |
|--------------------------------------|----------------------|-------------------|
| Model                                | <b>LM1220MP10</b>    |                   |
| Image circle                         | 2/3-inch (Φ 11.4)    |                   |
| Focal length                         | 12mm ±5%             |                   |
| F No.                                | F2.0-16              |                   |
| M.O.D(m)                             | 0.08-Inf.            |                   |
| Operation                            | Iris                 | Manual            |
|                                      | Focus                | Manual            |
| Horizontal Angle of View             | 2/3"Type             | 48.1°×39.7°×27.5° |
|                                      | 1/1.8"Type           | 39.7°×33.1°×22.3° |
|                                      | 1/2"Type             | 35.8°×29°×21.9°   |
| Distortion                           | At 0.4m              | -0.1%             |
| Back focal length                    | 10.94mm              |                   |
| Flange Back Focal Length             | 17.526mm             |                   |
| Mount                                | C-Mount              |                   |
| Relative Illumination                | 65%                  |                   |
| (CRA)                                | 11°                  |                   |
| Dimension                            | Φ29×37.65mm          |                   |
| Weight                               | 67.5g                |                   |
| (Lens structure)                     | 10groups, 11elements |                   |
| Filter Thread                        | M27*P0.5             |                   |
| Working Temperature                  | -20°C ~ +60°C        |                   |